

# 2 Piece SpringLamp®



- 10,000 Hour SpringLamp®
- 50,000 Hour Ballast
- Replaceable Lamp  
Maximum use of long life ballast
- Energy Saving  
Use up to 75% less energy compared to incandescent


**TCP** TECHNICAL  
CONSUMER  
PRODUCTS, INC.

# SpringLamp® 2-Piece SPECIFICATIONS

Lamp Type: 2-Piece SpringLamp® Compact Fluorescent, 159 series NPF, 160 series HPF

Item #	Watts	Incandescent Wattage Comparison	Initial Lumens	Color Rendering Index	Input Line Current	Total Harmonic Distortion	Power Factor	Replacement Lamps
15909L	9	35	400	82	.16A	<150%	> .50	35009
15911L	11	40	550	82	.19A	<150%	> .50	35011
15915L	15	60	930	82	.24A	<150%	> .50	35015
15918L	18	60	1200	82	.29A	<150%	> .50	35018
15923L	23	90	1400	82	.35A	<150%	> .50	35023
15926L	26	100	1750	82	.45A	<150%	> .50	35026
15932L	32	120	2100	82	.49A	<150%	> .50	35032
16009L	9	35	400	84	.09A	< 33%	> .90	35009
16011L	11	40	550	84	.11A	< 33%	> .90	35011
16015L	15	60	930	84	.15A	< 33%	> .90	35015
16018L	18	60	1150	84	.18A	< 33%	> .90	35018
16023L	23	90	1400	84	.20A	< 33%	> .90	35023
16026L	26	100	1750	84	.23A	< 33%	> .90	35026

All 2-piece SpringLamps are 2.20 Inches in Diameter

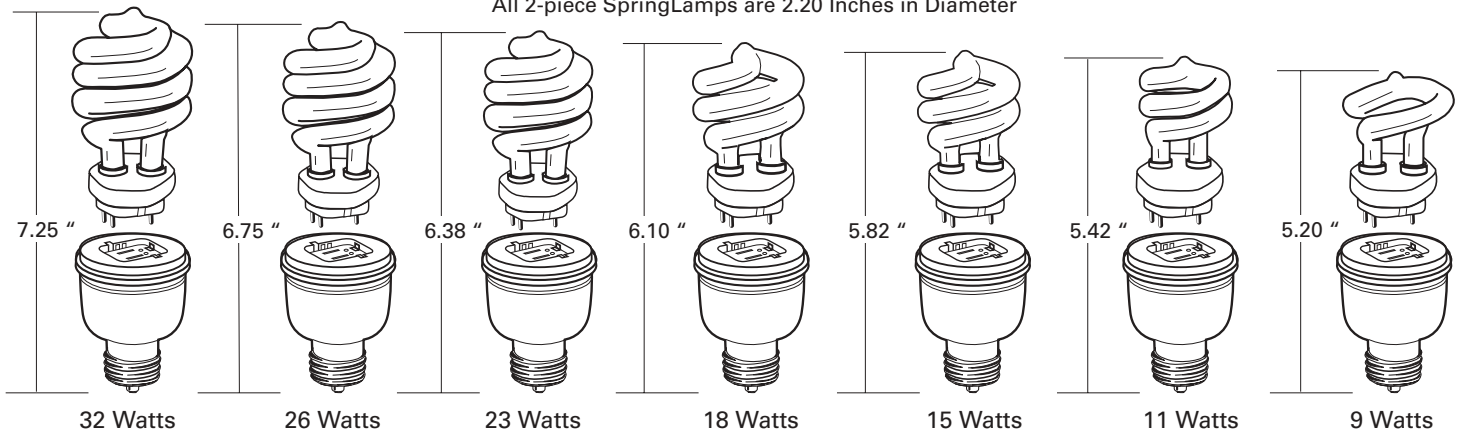

## Features and Benefits:

- Long life, 10,000 hour average rated lamp life  
50,000 hour average rated ballast life
- Lasts 7 years, based on 4 hours use per day
- Lasts 10-13 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- Saves up to 75% in Energy Costs compared to similar light output incandescent lamps
- 2700°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance

## Specifications ( at full brightness )

End of Life Protection	Yes
Ballast Type	Electronic
Starting Method	Modified Rapid Start
Input Line Voltage	120VAC
Input Line Frequency	60HZ
Lamp Life (rated)	10,000 Hours
Ballast Life (rated)	50,000 Hours
Color Temperature	2700°K
Minimum Starting Temperature	-20 ° F
Maximum Operating Temperature	160 ° F
U.L. / C.U.L. Listed	Yes
FCC Compliance	Part 18, Subpart C
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor	< 1.60
Maximum Open Circuit Voltage	600V

## Applications:

- Use anywhere a standard incandescent is used.



Perfect for:

- Table lamps
- Floor lamps
- Ceiling fixtures
- Closet lights



ISO 9002  
CERTIFIED

12 MONTH  
WARRANTY

**TCPI** TECHNICAL  
CONSUMER  
PRODUCTS, INC.

Lighting the Way to Energy Efficiency

300 Lena Drive Aurora, Ohio 44202  
PHONE: (330) 995-6111 or 1-800-324-1496  
FAX: (330) 995-6188  
E-MAIL: sales@springlamp.com  
www.tcpi.com

SLS159/160-402